
S U P P L Y I N G C L E A N A I R T O I N D U S T R Y

MODEL M33 R&L Media Air Cleaner



The M33 is a self-contained media air cleaning system designed for general background or ducted for source capture applications. The M33 can be ordered with three-stage filtration which will effectively remove a broad range of airborne contaminants including fine dusts, smoke, soot, vapors, mist, VOC's and more at a rate of up to 1500 cfm.



**AIR QUALITY
ENGINEERING**

Manufacturer and Worldwide Distributor of Air Cleaning Systems for Over 25 Years

M33 R&L FEATURES & SPECIFICATIONS

DIMENSIONS: 27 1/2 H x 14 1/2 W x 56 L

WEIGHT: 200 lbs. installed
240 lbs. shipping weight

CABINET: 16 gauge welded steel cabinet with a baked enamel, textured coated finish.

POWER INPUT: 110 - 120 Vac, 60 hz, 1 phase, 12 amps
208-240 Vac, 60 hz, 1 phase, 6 amps

PRIMARY FILTER: Dimensions on the bag filters are 12 x 24 x 26

AIRFLOW/EFFICIENCY:

Stock #	Filter*	CFM = Cubic Feet Per Minute	
		1 HP	WG
41128	95-98% Bag	1125 CFM	1.3
41129	85-90% Bag	1250 CFM	1.1
41130	65-70% Bag	1270 CFM	1.0
41131	45-50% Bag	1315 CFM	1.0

*Efficiency based on ASHRAE Dust Spot 52-76.

AMBIENT TEMPERATURE: 175° maximum.

MOUNTING: Standing or hanging cabinet with horizontal airflow. Ceiling mount brackets – standard.

PREFILTER: 30-35% efficiency, pleated 12 x 24 x 4 . Filter media is a cotton and synthetic blend. Total prefilter media area is 15 sq. ft.

MOTOR: 1 HP sealed ball bearings and thermally protected. Adjustable motor sheave allows for field adjustments to the rated air flow.

BLOWER: Forward curved, ball bearing, belt driven centrifugal blower. This blower is capable of moving 2250 cfm free air.

INSTRUMENTATION: **Dirty Filter Gage** – Factory installed pressure gage designed to determine filter replacement cycle.

Indicator Light – Light indicates that the blower motor is energized properly.

FILTER ACCESS: Side load track system with hinged access door.

SOUND LEVELS: 72 dBa at 9 , 70 dBa at 12 .

STANDARD FEATURES:

- 36 month parts warranty.
- One HP maintenance-free motor.
- Dirty filter gage.
- 35% efficient 4 pleated prefilter.
- 10 power cord with molded plug.



OPTIONAL EQUIPMENT:

- Impinger assembly for mist applications.
- Plenum, ducting and hood accessories.
- 2 HP motor upgrade.
- Extended service filter upgrade.
- 65% ASHRAE prefilter.
- Minihelic® upgrade
- Bulk refillable carbon module

M33L SHOWN WITH OPTIONAL PLENUM



M33L SHOWN WITH OPTIONAL 22 LB. CARBON MODULE & E.S.F. FILTER

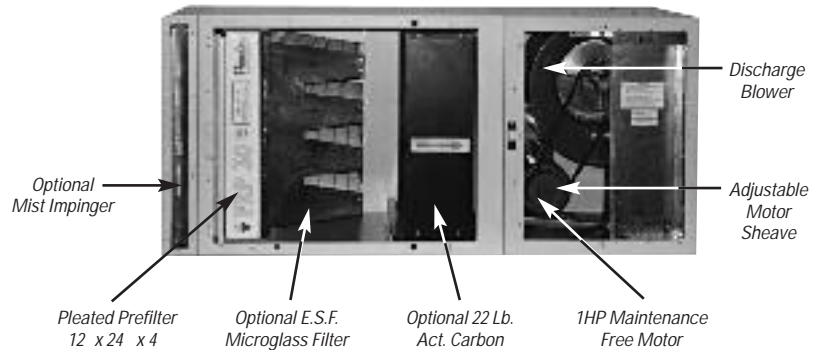

**AIR QUALITY
ENGINEERING**

7140 Northland Drive North, Brooklyn Park, MN 55428-1520 USA

FAX: (763) 531-9900 EMAIL: aqe@isd.net WEB SITE: www.air-quality-eng.com

TOLL FREE: 1-800-328-0787

Air Quality Engineering, Inc., has a policy of continuing product improvement, and reserves the right to make changes in design and specification without notice.

PN51621 11/02
©2002 Air Quality Engineering, Inc.