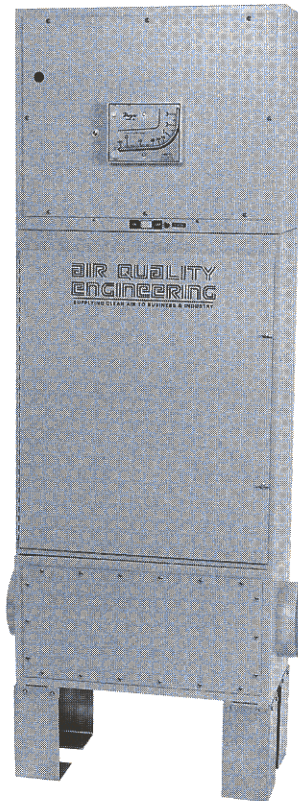


S U P P L Y I N G C L E A N A I R T O I N D U S T R Y

New! **MODEL M660**
Vertical Oil Mist Collector



*The new M660 from Air Quality Engineering Inc.
is a self-contained media air cleaning system designed for
source capturing coolant mist applications in industry. The M660 can be
ordered in three stage filtration which will effectively remove a broad range of
contaminants including mist, smoke, soot, vapors, VOC's and more
at a rate of up to 1675 cfm.*



**AIR QUALITY
ENGINEERING**

Manufacturer and Worldwide Distributor of Air Cleaning Systems for Over 25 Years

M660 FEATURES & SPECIFICATIONS

How It Works:

Mist laden air enters the unit from the base where it turns upward 90° before entering the two aluminum mesh impingers. The aluminum mesh impingers screen out the large droplets from the airstream before entering the primary filter. The primary filter condenses the remaining mist allowing the clean air to discharge from the top of the unit. Condensed mist drains out of the bottom of the unit.

STANDARD FEATURES:

- 36 months parts warranty.
- One HP maintenance-free motor.
- 10' power cord with molded plug.
- Sump kit.
- Two 8" collars for ducting.

OPTIONAL ACCESSORIES:

- 2 hp and 3 hp motor upgrade.
- 45 lb. carbon module
- Two 10" collars for ducting

SPECIFICATIONS:

DIMENSIONS: 84 1/4" H x 27" W x 26 1/4" L

WEIGHT: 360 lbs. installed weight
430 lbs. shipping weight

CABINET: 16 gauge welded steel cabinet with a baked enamel, textured coated finish. Built-in sump and drain connection for oil mist removal.

POWER INPUT:

Voltage	Phase	1 HP Amps	2 HP Amps	3 HP Amps
110-120	1	12	NA	NA
208-240	1	6.6	9	NA
208-240	3	3.8	7	9
440-480	3	1.9	3.5	4.4

MOTOR: 1 HP, maintenance-free sealed ball bearing and thermally protected. Adjustable sheave allows for field adjustments to the rated airflow.

BLOWER: Forward curved, ball bearing, belt driven centrifugal blower. This blower is capable of moving 4400 cfm free air.

INSTRUMENTATION: **Dirty Filter Gauge** Factory installed pressure gauge designed to determine filter replacement cycle.

Indicator Light Light indicated that the blower motor is energized properly.

FILTER ACCESS: Side load track system with hinged access door.

SOUND LEVELS: 67 dBA at 9', 66 dBA at 15'.

FILTER SELECTION:


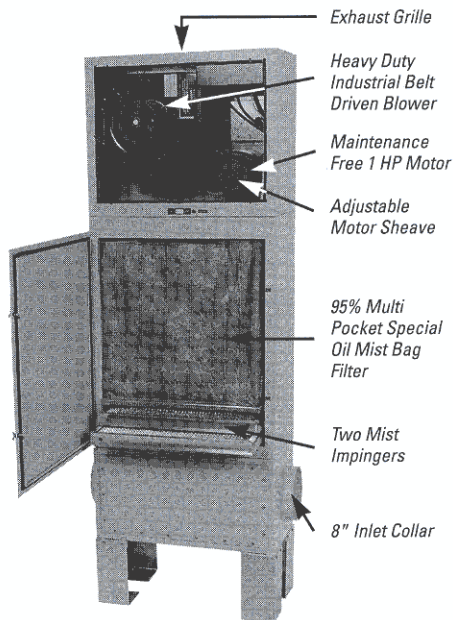
PREFILTER: Two, 24" x 24" x 2" aluminum mesh, mist impingers.

PRIMARY FILTER: Dimensions on the bag filters are 24" x 24" x 26".

AIR FLOW*

Filter	CFM = Cubic Feet Per Minute Per Hose					
	1 HP		2 HP		3 HP	
	1 Hose	2 Hose	1 Hose	2 Hose	1 Hose	2 Hose
95% Bag	1155	865	1575	1050	1665	1245
85% Bag	1170	870	1595	1065	1675	1260

*Air Flows based on 8" diameter flex hose, 10' long.



**AIR QUALITY
ENGINEERING**

AIR QUALITY ENGINEERING, INC.

7140 Northland Drive North
Minneapolis, MN 55428-1520
(800) 328-0787 • Fax: (763) 531-9900
aqe@isd.net • www.air-quality-eng.com